


# Pipeline Speaker PL-12

## Specifications

- Type : Full-range simple amp drive
- Speaker Unit : 12 flat units are connected
- Impedance : 8Ω
- Freq. range : 140Hz - 20kHz ±3dB
- SPL : 88dB at 1m 1W
- Rated Input : 90W continous
- Maximum Input : 180W continous
- Directional characteristics : Vertical 0°, Horizontal 110°
- Input connector : NL-4MP (Neutrick )
- Cabinet : Aluminum cylindrical cabinet
- Hanging point : φ3/8 threaded hole on both the top and bottom
- Dimensions : φ75 × 1,790mm
- Net weight : 6.0kg
- Color : Black or Silver

※This specifications may change without notice.

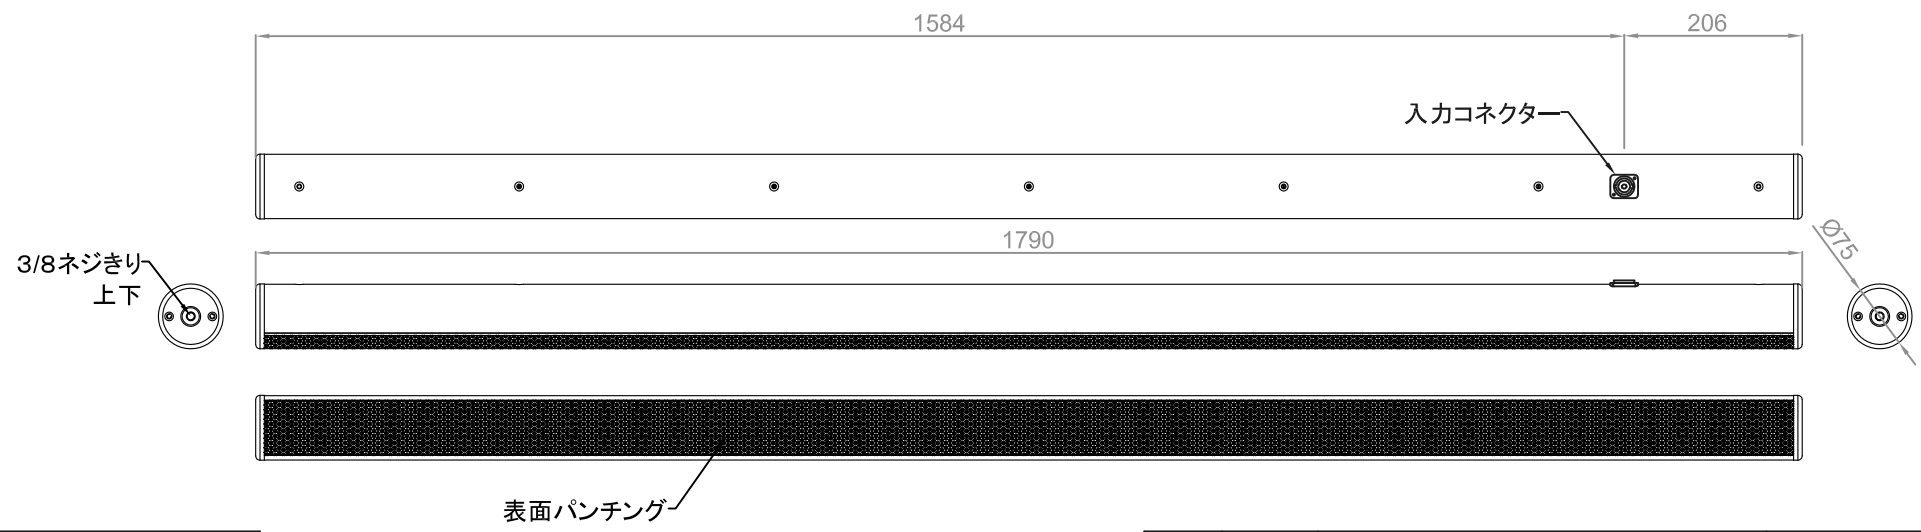

No. PART NAME

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
DRAW.		Checked by	Approved by - date	File name	Date	Scale
T.Yamaguchi					2010.5.7	
<b>FPS INC.</b> 株式会社エフピーエス					Pipeline Speaker PL-12	
					Outline view, Specifications	Edition