RevNo	Revision note	Date	Checked

Pipeline Speaker
SubWoofer
PL-SWB

Specifications

Type	:	Full-range simple amp drive
Speaker Unit	:	25cm cone speakers are connected
Impedance	:	8Ω
Freq. range	:	30Hz - 500Hz
SPL	:	93dB at 1m 1W
Rated Input	:	200W continous
Maximum Input	:	400W continous
Directional characteristics	:	Omni-directional
Input connector	:	NL-4MP (Neutrick)
Output connector	:	NL-4MP (Neutrick)
Cabinet	:	MDF cabinet
Dimensions	:	356 × 386 × 381 (W × H × D mm)
Net weight	:	15.0kg
Color	:	Black or Silver

※This specifications may change without notice.

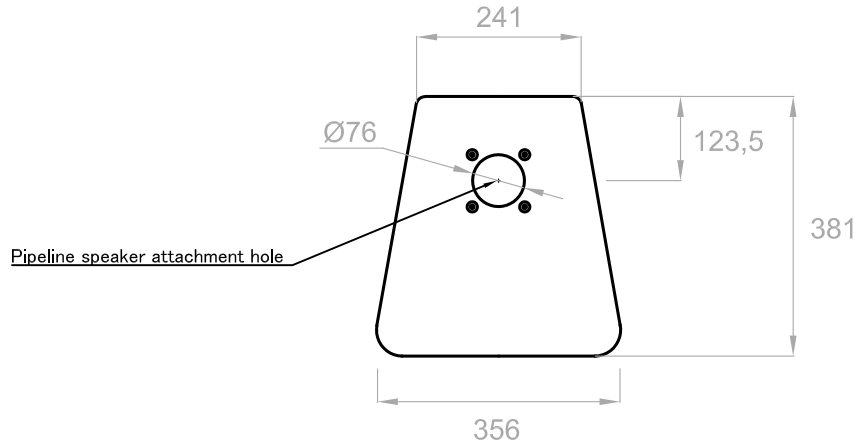

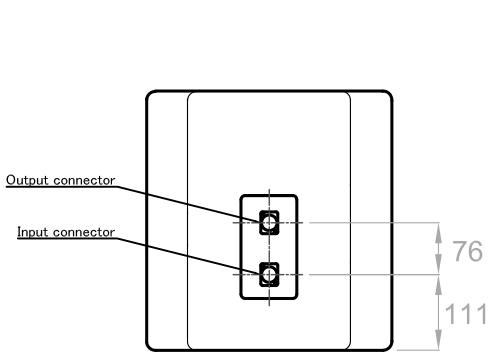

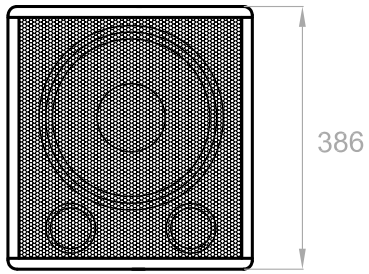

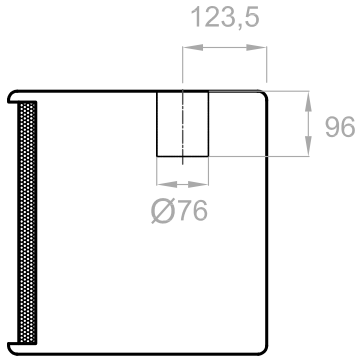

No.	PART NAME

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
DRAW. T.Yamaguchi		Checked by	Approved by - date	File name	Date 2010.6.2	Scale
FPS INC. 株式会社エフピーエス					Subwoofer for pipeline speaker PL-SWB	
					Outline view, Specifications	Edition / Sheet