RevNo	Revision note	Date	Signature	Checked

Pipeline Speaker
SubWoofer
SW-P2

Specifications

Type	:	Full-range simple amp drive
Speaker Unit	:	2 units of 13cm cone speakers are connected
Impedance	:	12Ω
Freq. range	:	50Hz - 500Hz
SPL	:	93dB at 1m 1W
Rated Input	:	120W continous
Maximum Input	:	240W continous
Directional characteristics	:	Omni-directional
Input connector	:	NL-4MP (Neutrick)
Cabinet	:	Aluminum cylindrical cabinet
Hanging point	:	φ3/8 threaded hole on both the top and bottom
Dimensions	:	φ200 × 520mm
Net weight	:	5.9kg
Color	:	Black or Silver

※This specifications may change without notice.

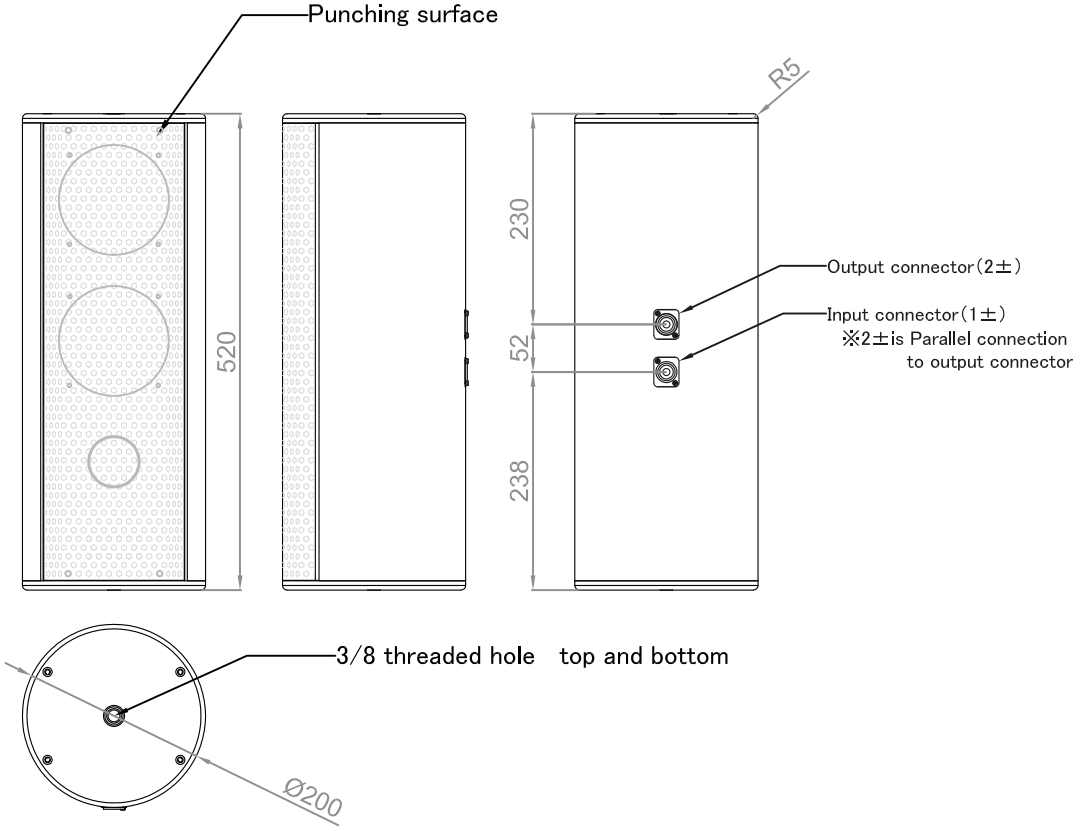

No.	PART NAME

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
DRAW.		Checked by	Approved by - date	File name	Date 2010.5.7	Scale

FPS INC.
株式会社エフピーエス

Subwoofer for Pipeline Speakers SW-P2

Outline view, Specifications | Edition | Sheet